





W-08-23-0884

1

11

1/2 " N



~

~

~

√

Ü

105~

√

Ü

105~

~

1/2 " N

1 1/2 " N

2022 1 1 -2022 12 31

48.3 kg CO₂-eq

~

ü

711

ISO 14040:2006



1.		3
2.		3
3.		3
4.		



~

W-08-23-0884

3

11



~

W-08-23-0884

5

11

4.4.2



Pin	NML1/2H.00.02-HPb55-3/-HX 3		0.9	g
Inner core	NML1/2B.02.02- /-HX 3		1.24	g
Rear insulator	NML1/2F.00.08-TPX/-	TPX	0.15	g
Insulator	NML1/2F.00.07-TPX/-	TPX	0.25	g
Seal ring	NML1/2H.00.06-R01/-		0.15	g
PVC PVC flat pad	NML1/2E.00.08-PVC R01/-	PVC	0.22	g
✓ Circlip	NML1/2F.00.06-SUS304/-	304#	0.37	g
packaging			1/300	p

2

Λ				
Λ		5T	171	km
		30T	57	

3

--	--



W-08-23-0884

7

11

Exhibit 3

11

11



2022 1 1 2022 12 31

6.2

 $\leq 0.5\%$

6.2.1

cut-of

6.2.2

6.3

2019

GWP100

IPCC

7

		48.3	kgCO ₂ -eq
Upstream transportation		0.003	
1	Raw material assembly	8.57	
	Packaging	0.121	
Downstream transportation		39.6	
1			
			kgCO ₂ -eq
Enclosure		0.737	
Inner core		0.783	
Seal ring		0.777	
Screw insert		0.788	
1	Circlip	0.24	
Insulator		1.29	
Rear housing		0.787	
Rear insulator		0.777	
Cable clamp		0.661	



W-08-23-0884


9

11


Pin
PVC PVC flat pad

0.584
1.14

7.1

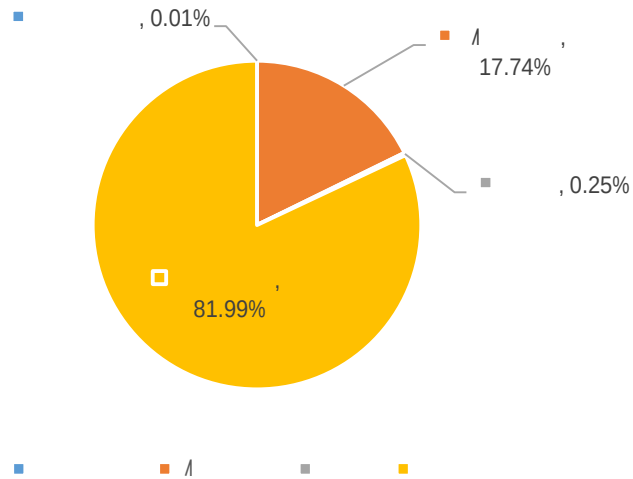

1

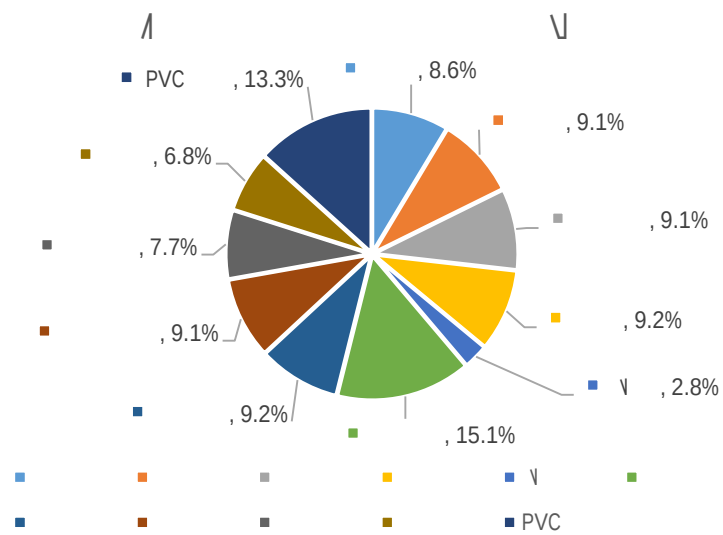

2

1



7.2


7.2.1

XXXXXXXXXXXXXXXXXXXX



7.2.2


IPCC 2021 GWP100 V1.01
α



3 - GWP100

47.9 kg CO₂-eq 2.85 48.3 kg CO₂-eq 95% 5.92%

7.3

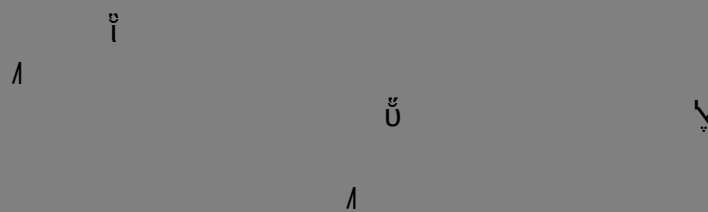

2023

8 11

8.1 Λ

8.2

8.3

9. $\frac{1}{2} \approx 0.5$

8.4

$$\Lambda \quad \overline{\Gamma} \quad \mathbb{V}$$

i A

